



Please observe the following when setting up the device

- > For devices to be operated on the desktop, please attach the adhesive rubber footpads
- > Do not rest any objects on top of the device and do not stack multiple devices



- > Keep the ventilation slots on the side of the device clear of obstruction
- > In case of wall mounting, use the drilling template as supplied




- > Rack installation with the optional LANCOM Rack Mount (not supplied)



LANCOM R883VAW Quick Reference Guide



LANCOM
Systems

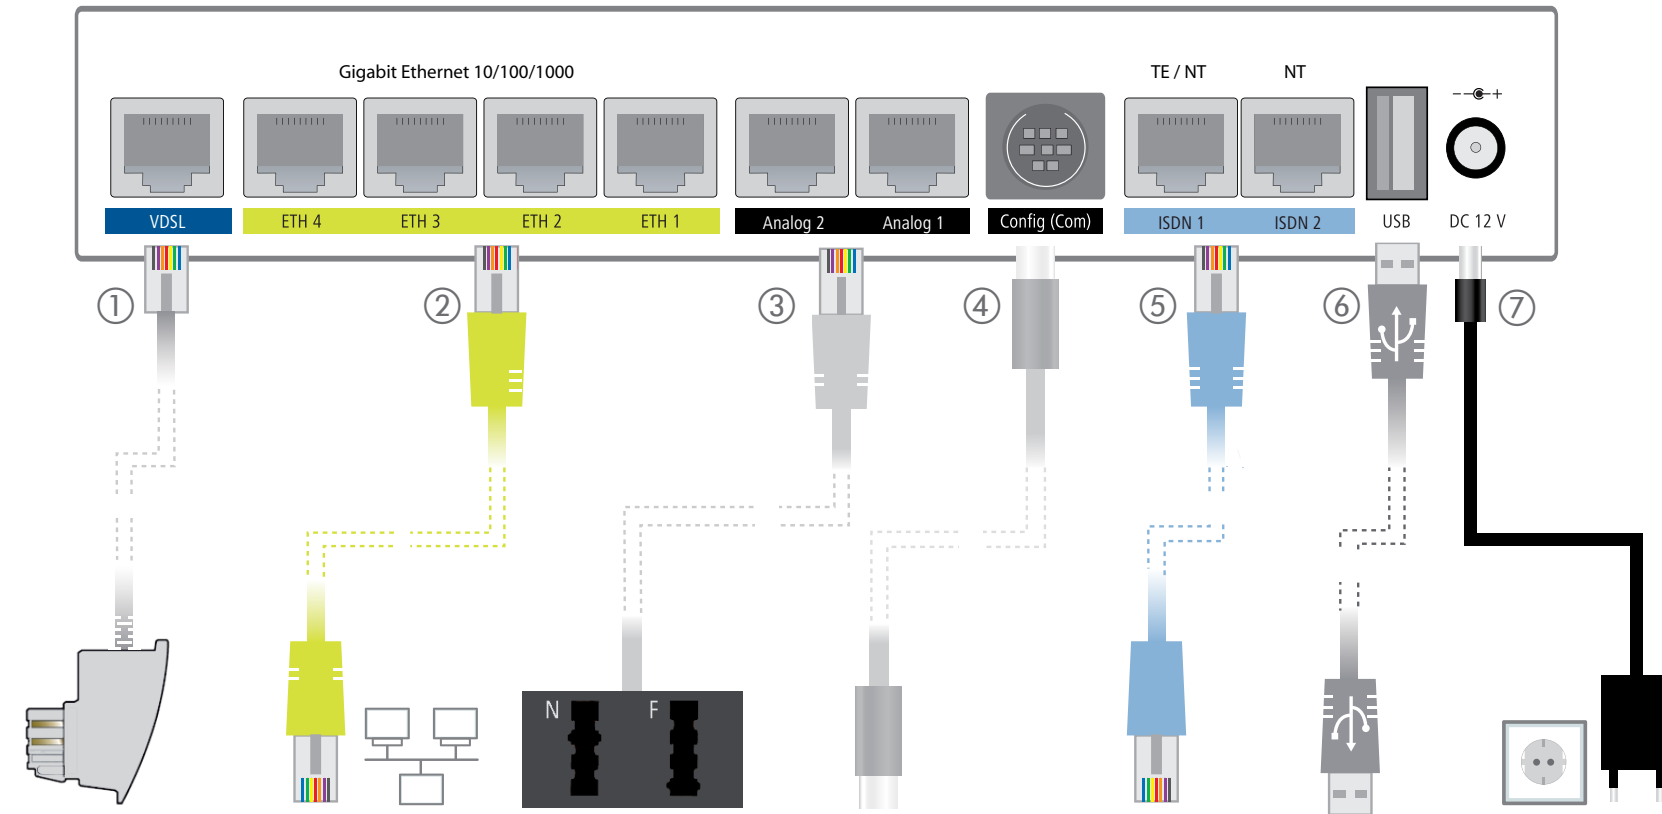


- VDSL interface**
Use the supplied DSL cable for the IP-based line to connect the VDSL interface and the provider's telephone socket. For more information, please contact your Internet service provider.
- Ethernet interface**
Use the cable with the green-colored connectors to connect one of the interfaces ETH1 to ETH4 to your PC or a LAN switch.
- Analog interface**
Connect analog terminal devices to the analog interfaces either directly via RJ11 or with the help of the enclosed TAE adapter.
- Serial interface**
Configuring the device via the serial interface requires a serial configuration cable (available separately).
- ISDN interface**
ISDN 1
Internal (NT) or external (TE) ISDN bus. This feature is controlled by LCOS.

ISDN 2
Internal (NT) ISDN bus.

A 100-Ohm resistor for line termination is switchable in LCOS.
- USB interface**
You can use the USB interface to connect a USB printer or a USB drive.
- Power**
When connecting the cable to the device, turn the bayonet connector 90° clockwise until it clicks into place.

 Use only the supplied power adapter.

MOUNTING AND CONNECTING THE DEVICE

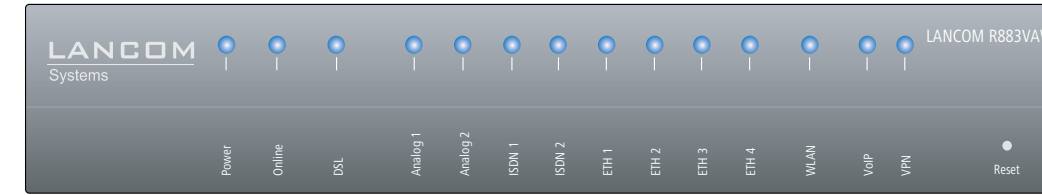

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

1 Power	
Off	Device switched off
Green, permanently	Device operational
Red/green blinking	Configuration password not set. Without a configuration password, the configuration data in the device is unprotected.
Red blinking	Charge or time limit reached
2 Online	
Off	WAN connection inactive
Green, permanently	WAN connection active
Red, permanently	WAN connection error
3 DSL	
Off	Interface deactivated
Green, permanently	DSL connection active
Green, flickering	DSL data transfer
Red, flickering	DSL transfer error
Red/orange, blinking	DSL hardware error
Orange, blinking	DSL training
Orange, permanently	DSL sync
Green, blinking	DSL connecting
4 Analog	
Off	Interface deactivated
Green, permanently	Interface activated
Orange, blinking	Incoming call
Green, blinking	Connection active
5 ISDN	
Off	Interface deactivated
Green, permanently	D-channel active
Green, flickering	ISDN data transfer
Red, flickering	ISDN transfer error
Red/orange, blinking	ISDN hardware error
6 ETH	
Off	No networking device attached
Green, permanently	Connection to network device operational, no data traffic
Green, flickering	Data transmission
7 WLAN	
Off	No Wi-Fi network defined or Wi-Fi module deactivated. The Wi-Fi module is not transmitting beacons.
Green, permanently	At least one Wi-Fi network is defined and Wi-Fi module activated. The Wi-Fi module is transmitting beacons.
Green, blinking	DFS scanning or other scan procedure
8 VoIP	
Off	No SIP accounts defined or VCM is off
Green, permanently	All defined and active SIP accounts (outgoing) were successfully registered
Red, permanently	Not all defined and active SIP accounts were registered (possibly still in process)
Red or green, inverse flashing	Number of currently used lines (connecting or connected)
9 VPN	
Off	VPN connection inactive
Green, permanently	VPN connection active
Green, flashing	VPN connecting
10 Reset	
Reset switch	Operated e.g. with a paper clip > short press: Restart the device > long press: Reset the device

Hardware	
Power supply	12 V DC, external power adapter (230 V); bayonet connector to secure against disconnection
Power consumption	Max. ca. 14 W
Environment	Temperature range 0–35 °C; humidity 0–95 %; non-condensing
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; measures 210 x 45 x 140 mm (W x H x D)
Number of fans	None; fanless design, no rotating parts, high MTBF
Interfaces	
LANCOM R883VAW over ISDN	
WAN: VDSL2	> VDSL2 as per ITU G.993.2; profiles 8a, 8b, 8c, 8d, 12a, 12b, 17a; > Compatible to VDSL2 from Deutsche Telekom > ADSL conformity according to: ADSL2+ over ISDN as per ITU G.992.5 Annex B/J with DPBO, ADSL2 over ISDN as per ITU G.992.3 Annex B, ADSL over ISDN as per ITU G.992.1 Annex B. > Supports just one virtual connection at a time in ATM (VPI-VCI pair)
Wi-Fi	> Frequency band: 2400-2483.5 MHz (ISM) or 5150-5825 MHz (restrictions vary between countries) > Radio channels 2.4 GHz: Up to 13 channels, max. 3 non-overlapping (2.4-GHz band) > Radio channels 5 GHz: Up to 26 non-overlapping channels (channels available vary according to country regulations; DFS for automatic dynamic channel selection required)
ETH	4 individual ports, 10 / 100 / 1000 Mbps Gigabit Ethernet, by default set to switch mode. Up to 3 ports can be operated as additional WAN ports. Ethernet ports can be electrically disabled in the LCOS configuration.
USB	USB 2.0 hi-speed host port for connecting USB printers (USB print server), serial devices (COM-port server) or USB drives (FAT file system)
ISDN 1 / ISDN 2	ISDN 1: Internal (NT) or external (TE) ISDN bus. This feature is controlled by LCOS. According to the settings, connect the light-blue ISDN cable either to the NTBA or the ISDN terminal device. ISDN 2: Internal (NT) ISDN bus. Use the light-blue ISDN cable to connect the ISDN device to the ISDN interface.
Analog 1 / Analog 2	Use the cable of your analog devices to connect them with the analog interfaces. If necessary, use the enclosed adapter.
Config (Com) / V.24	Serial configuration interface/COM-port (8-pin mini-DIN): 9,600 - 115,200 baud, suitable for optional connection of analog/GPRS modems. Supports internal COM-port server and provides transparent asynchronous serial-data transfer via TCP.
WAN protocols	
VDSL, ADSL, Ethernet	PPPoE, PPPoA, IPoA, Multi-PPPoE, ML-PPP, PPTP (PAC or PNS) and IPoE (with or without DHCP), RIP-1, RIP-2, VLAN
ISDN	DSS1 (Euro-ISDN), PPP, X75, HDLC, ML-PPP, V.110/GSM/HSCSD
Declaration of Conformity	
Hereby, LANCOM Systems declares that this radio equipment is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.lancom-systems.com/ce/	
Package content	
Manual	Quick Reference Guide (DE/EN); Installation Guide (DE/EN)
Cable	1 Ethernet cable, 3m (kiwi colored connectors); 1 DSL cable for an IP-based line, 4.25m; 1 ISDN cable, 3m (light-blue connectors)
Adapters	2 TAE adapters (RJ11 - TAE)
Power adapter	External power supply adapter (230 V); NEST 12 V / 1.5 A DC/S; barrel connector 2.1 / 5.5 mm bayonet; LANCOM item no. 111301

This product contains separate open-source software components which are subject to their own licenses, in particular the General Public License (GPL). The license information for the device firmware (LCOS) is available on the device's WEBconfig interface under "Extras > License information". If the respective license demands, the source files for the corresponding software components will be made available on a download server upon request.